



200 - 2.034 Nm

DATA LOGGING

BLUETOOTH CONNECTIVITY

RECHARGEABLE BATTERY

CONNECTIVITY WITH E-RAD


SPECIFICATIONS

- **TORQUE RANGE:** 200 - 2.034 Nm
- **WEIGHT:** 1,2 Kg
- **SQUARE DRIVE:** 1" inch square drive
- **BATTERY:** Built-in rechargeable li-ion battery
- **CONNECTIVITY:** Bluetooth
- **DATALOGGING:** Download logs (XLS, CSV, PDF)
- **TRACKING:** Pass & Fail, Track and Peak
- **CERTIFICATION:** According to ISO 17025
- **MAXIMUM DEVIATION:** +/- 1%*

*Test results from RAD's certified calibration lab

RAD CONNECT - PRODOCS

- Tool info
- Stored logs
- Torque graphs
- Process job
- Peak torque
- Export log as .CSV file.

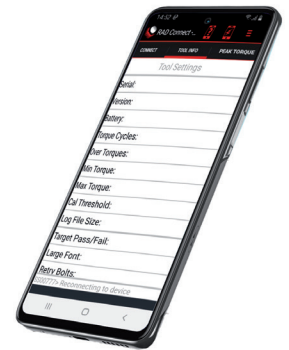

DIMENSIONS IN MM



TOOL KIT INCLUDING

- Smart Socket™ 46 mm
- Locking pin and o-ring
- Weatherproof storage case
- Preinstalled tablet with RAD Connect – PRODOCS App
- Calibration certificate
- User manual.



ACCESSOIRES

Product	Part number
Square drive insert 1" to ¾"	11749
Magnetic Hex Reducer 46 mm -> 24 mm	200820
Magnetic Hex Reducer 46 mm -> 27 mm	200821
Magnetic Hex Reducer 46 mm -> 29 mm	200449
Magnetic Hex Reducer 46 mm -> 30 mm	200822
Magnetic Hex Reducer 46 mm -> 32 mm	200823
Magnetic Hex Reducer 46 mm -> 36 mm	200824
Magnetic Hex Reducer 46 mm -> 41 mm	200825



Safe & Reliable



Lithium-ion battery



According to European standards



Bluetooth connectivity



Software data exchange



Accredited ISO/IEC 17025