Smart Sockets™ 46 mm

Part Number: **20880**

200 - 2.000 Nm
DATA LOGGING
BLUETOOTH CONNECTIVITY
RECHARGEABLE BATTERY
CONNECTIVITY WITH E-RAD

SPECIFICATIONS

- ***TORQUE RANGE:*** 200 - 2.000 Nm
- ***WEIGHT:*** 1,3 Kg
- ***SQUARE DRIVE:*** 1" inch square drive
- ***BATTERY:*** Built-in rechargeable li-ion battery
- ***CONNECTIVITY:*** Bluetooth
- ***DATALOGGING:*** Download logs (XLS, CSV, PDF)
- ***TRACKING:*** Pass & Fail, Track and Peak
- ***CERTIFICATION:*** According to ISO 17025
- ***MAXIMUM DEVIATION:*** +/- 1%*.

** Test results from RAD's certified calibration lab*

RAD CONNECT - PRODOCS

- Tool info
- Stored logs
- Torque graphs
- Process job
- Peak torque
- Export log as .CSV file.

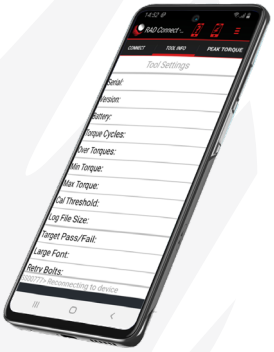

DIMENSIONS IN MM

TOOL KIT INCLUDING

- Smart Socket™ 46 mm
- Locking pin and o-ring
- Weatherproof storage case
- Calibration certificate
- User manual.

ACCESSOIRES

Product	*Part number*
Square drive insert 1" to ¾"	11749
Magnetic Hex Reducer 46 mm -> 24 mm	200820
Magnetic Hex Reducer 46 mm -> 27 mm	200821
Magnetic Hex Reducer 46 mm -> 29 mm	200449
Magnetic Hex Reducer 46 mm -> 30 mm	200822
Magnetic Hex Reducer 46 mm -> 32 mm	200823
Magnetic Hex Reducer 46 mm -> 36 mm	200824
Magnetic Hex Reducer 46 mm -> 41 mm	200825

Lithium-ion battery | Non Impacting | Bluetooth connectivity | According to European standards | Software data exchange

2024 - V.01 If there are any doubts or questions about the information in this document, please contact Radial Torque Tools.
The information in this document is subject to change without notice, no rights may be derived from its content.

RAD TORQUE SYSTEMS

WWW.RADIALTORQUE.EU