



1.100 - 10.800 Nm

DATA LOGGING

BLUETOOTH CONNECTIVITY

RECHARGEABLE BATTERY


CONNECTIVITY WITH E-RAD

SPECIFICATIONS

- **TORQUE RANGE:** 1.100 - 10.800 Nm
- **WEIGHT:** 4,0 Kg
- **SQUARE DRIVE:** 1½" inch square drive
- **BATTERY:** Built-in rechargeable li-ion battery
- **CONNECTIVITY:** Bluetooth
- **DATALOGGING:** Download logs (XLS, CSV, PDF)
- **TRACKING:** Pass & Fail, Track and Peak
- **CERTIFICATION:** According to ISO 17025
- **MAXIMUM DEVIATION:** +/- 1%*.

* Test results from RAD's certified calibration lab

DIMENSIONS IN MM

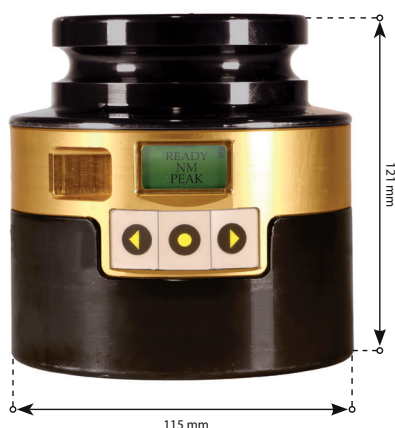

RAD CONNECT - PRODOCS

- Tool info
- Stored logs
- Torque graphs
- Process job
- Peak torque
- Export log as .CSV file.



TOOL KIT INCLUDING

- Smart Socket™ 80 mm
- Locking pin and o-ring
- Weatherproof storage case
- Preinstalled tablet with RAD Connect – PRODOCS App
- Calibration certificate
- User manual.



ACCESSOIRES

Product	Part number
Magnetic Hex Reducer 80 mm -> 30 mm	200862
Magnetic Hex Reducer 80 mm -> 36 mm	200863
Magnetic Hex Reducer 80 mm -> 46 mm	200835
Magnetic Hex Reducer 80 mm -> 50 mm	200858
Magnetic Hex Reducer 80 mm -> 55 mm	200830
Magnetic Hex Reducer 80 mm -> 60 mm	200831
Magnetic Hex Reducer 80 mm -> 65 mm	200832
Magnetic Hex Reducer 80 mm -> 70 mm	200857
Magnetic Hex Reducer 80 mm -> 75 mm	200834



Safe & Reliable



Lithium-ion battery



According to European standards



Bluetooth connectivity



Software data exchange



Accredited ISO/IEC 17025