

Smart Sockets™ 80 mm

Part Number: 20885



1.080 - 10.800 Nm

DATA LOGGING

BLUETOOTH CONNECTIVITY

RECHARGEABLE BATTERY

CONNECTIVITY WITH E-RAD


SPECIFICATIONS

- **TORQUE RANGE:** 1.080 - 10.800 Nm
- **WEIGHT:** 4,0 Kg
- **SQUARE DRIVE:** 1½" inch square drive
- **BATTERY:** Built-in rechargeable li-ion battery
- **CONNECTIVITY:** Bluetooth
- **DATALOGGING:** Download logs (XLS, CSV, PDF)
- **TRACKING:** Pass & Fail, Track and Peak
- **CERTIFICATION:** According to ISO 17025
- **MAXIMUM DEVIATION:** +/- 1%*.

* Test results from RAD's certified calibration lab

RAD CONNECT - PRODOCS

- Tool info
- Stored logs
- Torque graphs
- Process job
- Peak torque
- Export log as .CSV file.



DIMENSIONS IN MM




TOOL KIT INCLUDING

- Smart Socket™ 80 mm
- Locking pin and o-ring
- Weatherproof storage case
- Calibration certificate
- User manual.



ACCESSOIRES

Product	Part number
Magnetic Hex Reducer 80 mm -> 30 mm	200862
Magnetic Hex Reducer 80 mm -> 36 mm	200863
Magnetic Hex Reducer 80 mm -> 46 mm	200835
Magnetic Hex Reducer 80 mm -> 50 mm	200858
Magnetic Hex Reducer 80 mm -> 55 mm	200830
Magnetic Hex Reducer 80 mm -> 60 mm	200831
Magnetic Hex Reducer 80 mm -> 65 mm	200832
Magnetic Hex Reducer 80 mm -> 70 mm	200857
Magnetic Hex Reducer 80 mm -> 75 mm	200834

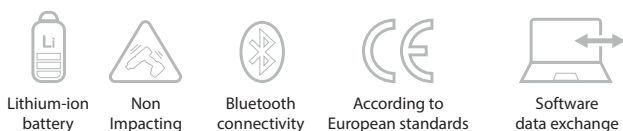

2024 - V.01 If there are any doubts or questions about the information in this document, please contact Radial Torque Tools.
The information in this document is subject to change without notice, no rights may be derived from its content.



WWW.RADIALTORQUE.EU