Smart Sockets™ 30 mm

Part Number: **26931**

200 - 2.000 Nm

DATA LOGGING

BLUETOOTH CONNECTIVITY

RECHARGEABLE BATTERY

CONNECTIVITY WITH E-RAD

SPECIFICATIONS

- ***TORQUE RANGE:*** 200 - 2.000 Nm
- ***WEIGHT:*** 1,4 Kg
- ***SQUARE DRIVE:*** ¾" inch square drive
- ***BATTERY:*** Built-in rechargeable li-ion battery
- ***CONNECTIVITY:*** Bluetooth
- ***DATALOGGING:*** Download logs (XLS, CSV, PDF)
- ***TRACKING:*** Pass & Fail, Track and Peak
- ***CERTIFICATION:*** According to ISO 17025
- ***MAXIMUM DEVIATION:*** +/- 1%*.

** Test results from RAD's certified calibration lab*

RAD CONNECT - PRODOCS

- Tool info
- Stored logs
- Torque graphs
- Process job
- Peak torque
- Export log as .CSV file.

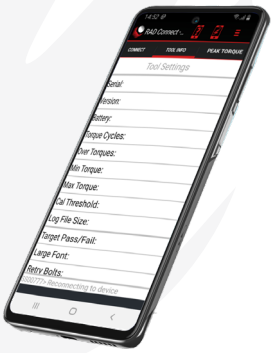

DIMENSIONS IN MM

TOOL KIT INCLUDING

- Smart Socket™ 30 mm
- Locking pin and o-ring
- Weatherproof storage case
- Calibration certificate
- User manual.

ACCESSOIRES

Product	*Part number*
Magnetic Hex Reducer 30 mm -> 16 mm	300165
Magnetic Hex Reducer 30 mm -> 24 mm	300166

Lithium-ion battery | Non Impacting | Bluetooth connectivity | According to European standards | Software data exchange

2024 - V.01 If there are any doubts or questions about the information in this document, please contact Radial Torque Tools.
The information in this document is subject to change without notice, no rights may be derived from its content.

RAD TORQUE SYSTEMS

WWW.RADIALTORQUE.EU