

MV-RAD 34-90°

Part Number: 200282



340 - 3.400 Nm

MAX SPEED 5,5 RPM

MAINTENANCE COUNTER

DIGITAL TORQUE SETTING

TORQUE + ANGLE FUNCTION

TORQUE CHECK FUNCTION

OPTION

SPECIFICATIONS

- **TORQUE RANGE:** 340 - 3.400 Nm
- **SPEED:** 5,5 RPM
- **WEIGHT:** 7,5 Kg, excluding reaction arm and socket
- **SQUARE DRIVE:** 1 inch square drive
- **NOISE LEVEL:** Maximum 80 dB
- **TORQUE SETTING:** 1 Nm incremental or 200 torque settings
- **PRESETS:** 8 programmable presets
- **INTELLIGENT COUNTER:** maintenance counter
- **REPEATABILITY ON SAME JOINT*:** +/- 3,5%.

* Test results from certified calibration lab

SUITABLE REACTION ARMS

Standard
PN: 16670



Deep socket
PN: 10515



Double ended
PN: 10516



Blank
PN: 10513




Double ended blank
PN: 10448



Safety sliding
On request



DIMENSIONS IN MM

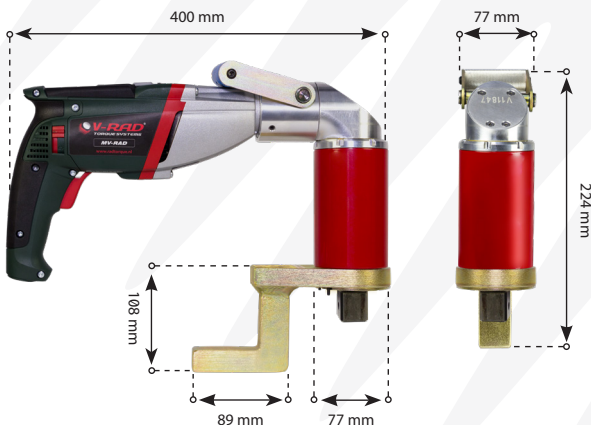

TOOL KIT INCLUDING

- MV-RAD 34-90°
- Standard reaction arm (PN: 16670)
- Two retaining rings (PN: 15367)
- Calibration certificate
- Usermanual
- QR code for Safety instructions
- Weatherproof storage case.



ACCESSORIES

Product	Part number
Swivelling tool handle (option)	15956
120V version (option)	17303



Non
Impacting



Safe &
Reliable



According to
European standards



**LABORATORY
ACCREDITATION
BUREAU**
ACCREDITED ISO/IEC 17025

Accredited
ISO/IEC 17025

2024 - V.02 Disclaimer: The information in this document is subject to change without notice. While endeavored to keep the information up to date and correct, no rights can be derived. If there are any doubts or questions, please contact Radial Torque Tools B.V..



WWW.RADIALTORQUE.EU

ELECTRIC SERIES

Accessories

Impact Sockets

Prod. Nr.	Hex size	Square drive	Bolt size	Suitable for
200190	24MM	3/4"	M16	MV-RAD 14(-90°)
200210	27MM	3/4"	M18	MV-RAD 14(-90°)
200211	30MM	3/4"	M20	MV-RAD 14(-90°)
200212	32MM	3/4"	M22	MV-RAD 14(-90°)
200004	36MM	3/4"	M24	MV-RAD 14(-90°)
200215	38MM	3/4"	M24	MV-RAD 14(-90°)
200005	41MM	3/4"	M27	MV-RAD 14(-90°)
200006	46MM	3/4"	M30	MV-RAD 14(-90°)
200216	50MM	3/4"	M33	MV-RAD 14(-90°)
200227	36MM	1"	M24	MV-RAD 20 & 40
200229	41MM	1"	M27	MV-RAD 20 & 40
200230	46MM	1"	M30	MV-RAD 20 & 40
200007	50MM	1"	M33	MV-RAD 20 & 40
200008	55MM	1"	M36	MV-RAD 20 & 40
200009	60MM	1"	M39	MV-RAD 40




CX Offset Gearboxes

Prod. Nr.	Gearbox
27978	Hex 50 mm
28540	Hex 65 mm

Prod. Nr.	Suitable for	Gearbox
16155	MV-RAD 14	27978
26994	MV-RAD 20	27978
13034	MV-RAD 34-90°	27978
28532	MV-RAD 34-90°	28540

Hex reducer on request.



Nose extension series

Prod. Nr.	Gearbox	Length
14195	MV-RAD 14(-90°)	324 mm
14200	MV-RAD 14(-90°)	400 mm
14205	MV-RAD 14(-90°)	476 mm
18185	MV-RAD 20	349 mm
19058	MV-RAD 20	400 mm
19059	MV-RAD 20	476 mm
12096	MV-RAD 34-90°	330 mm
12061	MV-RAD 34-90°	406 mm
12097	MV-RAD 34-90°	470 mm
11750	MV-RAD 40	318 mm
11751	MV-RAD 40	394 mm
11752	MV-RAD 40	470 mm



Non
Impacting



Safe &
Reliable



According to
European standards



LABORATORY
ACCREDITATION
BUREAU
ACCREDITED ISO/IEC 17025

Accredited
ISO/IEC 17025

2024 - V.02 Disclaimer: The information in this document is subject to change without notice. While endeavored to keep the information up to date and correct, no rights can be derived. If there are any doubts or questions, please contact Radial Torque Tools B.V..



WWW.RADIALTORQUE.EU