



1.600 - 16.200 Nm

DATA LOGGING

BLUETOOTH CONNECTIVITY

RECHARGEABLE BATTERY

CONNECTIVITY WITH E-RAD


SPECIFICATIONS

- **TORQUE RANGE:** 1.600 - 16.200 Nm
- **WEIGHT:** 4,0 Kg
- **SQUARE DRIVE:** 1½" inch square drive
- **BATTERY:** Built-in rechargeable li-ion battery
- **CONNECTIVITY:** Bluetooth
- **DATALOGGING:** Download logs (XLS, CSV, PDF)
- **TRACKING:** Pass & Fail, Track and Peak
- **CERTIFICATION:** According to ISO 17025
- **MAXIMUM DEVIATION:** +/- 1%*.

* Test results from RAD's certified calibration lab

RAD CONNECT - PRODOCS

- Tool info
- Stored logs
- Torque graphs
- Process job
- Peak torque
- Export log as .CSV file.

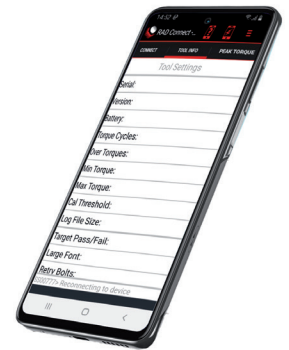

DIMENSIONS IN MM



TOOL KIT INCLUDING

- Smart Socket™ 65mm
- Locking pin and o-ring
- Weatherproof storage case
- Preinstalled tablet with RAD Connect – PRODOCS App
- Calibration certificate
- User manual.



ACCESSOIRES

Product	Part number
Magnetic Hex Reducer 65 mm -> 36 mm	200897
Magnetic Hex Reducer 65 mm -> 41 mm	200901
Magnetic Hex Reducer 65 mm -> 46 mm	200902
Magnetic Hex Reducer 65 mm -> 50 mm	200903
Magnetic Hex Reducer 65 mm -> 55 mm	200904
Magnetic Hex Reducer 65 mm -> 60 mm	200905



Safe & Reliable



Lithium-ion battery



According to European standards



Bluetooth connectivity



Software data exchange



Accredited ISO/IEC 17025